



MeiG Smart SRM825 Module

5G NR M.2 Packaging

MeiG Smart SRM825 series of M2M modules are designed to provide IoT and eMBB services by 5G NR Sub-6GHz networks. It implements Qualcomm X55 chipset which supports SA and NSA network types, and comply with 3GPP Release 15 standard. The frequencies cover the main operators's network of the world.

The maximum 2.1Gbps-DL and 900Mbps-UL data rates on 5G Sub-6GHz networks can be supported, and also it has backward compatibility with LTE-A and 3G networks to ensure working in remote areas.

High-sensitivity GNSS implementing the Qualcomm IZat™ Gen 9 technology is also provided, which support GPS/GLONASS/BeiDou/Galileo/QZSS.

A rich set of interfaces(USB3.1/PCIe3.0/RGMII/SPI/UARTs/GPIOs), protocols (TCP/FTP/HTTP) and multiple OS compatibility extend the applicability of the module to a wide range of M2M applications, wireless router, HD TV , AR/VR, T-Box, Monitor, and etc.

Key Technologies:

- 5G NR Sub-6GHz, support 3GPP R15 and SA/NSA network type
- 5G NR DL Max Speed 2.1Gbps, UL Max Speed 900Mbps
- LTE-A support Cat.20, DL Max Speed 2Gbps, UL Max Speed 200Mbps
- Carrier Aggregation
- Compatibility of 5G NR/LTE-FDD/LTE-TDD/WCDMA Networks
- GNSS: Qualcomm® IZat™ Gen 9, including GPS/GLONASS/BeiDou/Galileo/QZSS
- High speed interfaces USB3.1、PCIe3.0、RGMII
- Support Voice Codec (HR/FR/EFR/AMR/AMR-WB), support CSFB/VoLTE/VoNR



Sub-6GHz



SA&NSA



USB3.1



PCIe 3.0



RGMII



MIMO



-40°C-85°C



GNSS

MeiG Smart SRM825 Module

5G NR M.2 Packaging

MEIG

Basic Features:

- Package: M.2 Package
- Size: 52.0×30.0×3.6mm
- Weight: About 12g

Module Speed:

- 5G NR Sub-6GHz:
 - MIMO 4*4, 256QAM
 - Downlink up to 2.1Gbps
 - Uplink up to 900Mbps
- LTE Cat.20:
 - MIMO 4*4, 256QAM
 - Downlink up to 2Gbps
 - Uplink up to 200Mbps
- DC-HSPA+:
 - Downlink up to 42.4Mbps
 - Uplink up to 5.76Mbps

Drivers & Tools:


- Drivers: Windows 7 above, Linux, Android
- Tools: One Click update tool, Gobinet Dial Tool
- FOTA upgrade*

Module Interfaces:

- USB 2.0/USB 3.0/USB 3.1 with SS Gen2
- PCIe Gen3.0
- eSIM
- RGMII
- UART
- SIM Card interface(1.8 / 3.0V)
- Antenna interface: main/diversity /MIMO/GNSS antenna, with a total of 6 antennas
- Power On/Off, Reset
- 1x PCM
- GPIOs

Certifications:

- CE*/FCC*/KC*/TELEC*

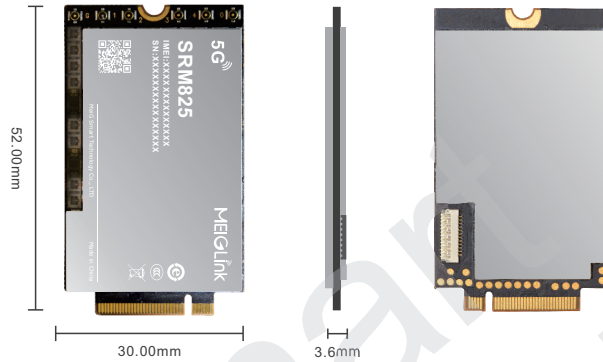

Transmission Power:

- Class 2 for N41/N77/N78/N79
- Class 3 for LTE-FDD
- Class 3 for LTE-TDD

Protocols:

- NDIS/ECM/IPv4/IPv6/TCP/UDP

Temperature and Humidity:

- Routine operating temperature: -30°C to 75°C
- Extended operating temperature: -40°C to 85°C
- Storage temperature: -45°C to 90°C
- Humidity: 5%~95%

SRM825 Band Information:

-EA:Region:EMEA,Australia,Japan,Korea

5G SA:N1/N3/N28/N40/N41/N77/N78/N79
5G NSA:N1/N3/N28/N40/N41/N77/N78/N79
LTE-FDD:B1/B3/B5/B7/B8/B18/B19/B20/B28/B32
LTE-TDD:B34/B38/B39/B40/B41/B42
WCDMA:B1/B3/B5/B8

-EU:Region:Europe,Southeast Asia

5G SA:N1/N3/N5/N7/N8/N20/N28/N38/N40/N41/N77/N78/N79
5G NSA:N1/N3/N5/N7/N8/N20/N28/N38/N40/N41/N77/N78/N79
LTE-FDD:B1/B3/B5/B7/B8/B18/B19/B20/B28/B32
LTE-TDD:B34/B38/B39/B40/B41/B42
WCDMA:B1/B3/B5/B8

-NA*:Region:North America,South America

5G SA:N2/N5/N12/N25/N41/N48/N66/N71/N77/N78
5G NSA:N2/N5/N12/N25/N41/N48/N66/N71/N77/N78
LTE-FDD:B2/B4/B5/B7/B12/B13/B14/B17/B25/B26/B29/B30/B66/B71
LTE-TDD:B41/B42/B43/B46/B48
WCDMA:B2/B4/B5

Remarks:* under development

MeiG Smart Technology Co.,Ltd

A Global Leading Supplier of Cellular Modules and Solutions

Add : 32/F, Building B, Shenzhen International Innovation Center,
No. 1006 Shennan Avenue, Futian District, Shenzhen, China
Tel : +86-755-83218588 Fax : +86-755-83219788
E-mail : ir@meigsmart.com Web : www.meigsmart.com



MeiG Official Wechat QR Code